


DATA SHEET NUMBER	NR8403-RO
REVISION	A
DATE	07242020

## NR8403-RO

### Three Channel Low Noise Rubidium Reference

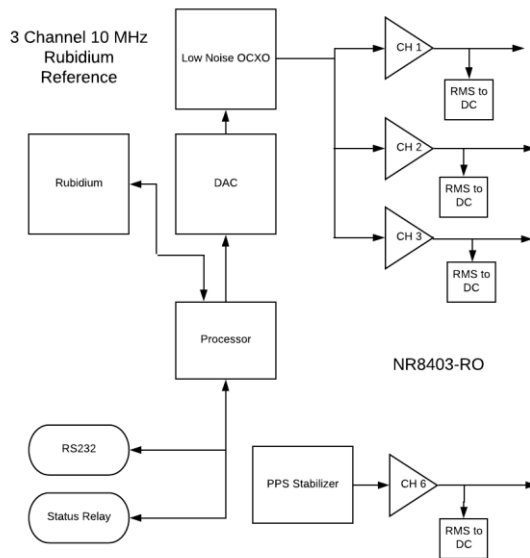

### OCXO Based Reference

Holdover < +-1 ppb/year

### Phase Noise

Offset Frequency (Hz)	Typical (dBc / Hz)
10	-125
100	-155
1K	-160
10K	-160

This reference brings exceptional stability in an economical package. There are three 10 MHz outputs plus a PPS and NMEA. External locking options allows the unit to be locked to an external PPS or 10 MHz reference. The unit is available as a 10 MHz reference or 50 MHz.

DATA SHEET NUMBER	NR8403-RO
REVISION	A
DATE	07242020

<b>Output</b>	10 MHz, 0.4 Vrms ±0.1, into 50 Ohms	
Accuracy at Shipment	<±5E-9	
Monthly Aging (unlocked)	<±3E-10 ppb/day after 3 months of operation	
Yearly Aging	<+-1 ppb after 3 months operation (unlocked)	
Harmonic Distortion	< -30 dBc	
Power	DC options and AC power adapter available- < 15 W start, < 10 W steady state	
Alert	20Vdc/Vac, 0.1 Amp relay contacts- relay closed for normal condition, BNC	
Warm-up time	<15 minutes	
Time of lock	<5 min -130 dBm	
GPS Disciplining	GNSS receiver	
Time for valid output	<12 minutes	
Frequency Accuracy	<1E-11	
Stability: Allan Deviation		
1s	<3E-10	
10s	<1E-10	
100s	<3E-11	
SSB Phase noise for 10Mhz		
	Standard	Low Noise Option
10Hz	< -95	<-110dBc
100Hz	<-125	<150dBc
1000Hz	<-140	<-155dBc
10000Hz	<-145	<-160dBc
Harmonic	<40dBc	
Non-Harmonic	<-80dBc	
<b>PPS (simulated)</b>		
Amplitude for 1PPS	3.3 Vdc CMOS (5 Vdc option)	
Pulse width for 1PPS	Programmable 1 to 500ms in 1 ms steps	
Rise time for 1PPS	<10 ns (faster edge available)	
Connector	BNC	
Load Impedance	50 Ohm	
Location	rear	
<b>Remote interface &amp; control</b>		
Protocol	RS232 NMEA-0183	
Connector	DB-9	
Location	Rear panel	
Protocol	Bit plus stop	
Standard Baud Rates	Selectable 4800, 9600, 19200, 38400, 57600 or 115200 bps	



<b>DATA SHEET NUMBER</b>	NR8403-RO
<b>REVISION</b>	A
<b>DATE</b>	07242020

<b>Main Power</b>		
DC input	-60 to +60 in three ranges	
Power	<6 W ( steady state < 10 W)	
<b>Warranty</b>	1 year	

### *Environmental and Mechanical*

Operating Temperature	0 to 50°C non-condensing
Storage Temperature	-40 to 70°C
Height	1.58"
Width	6"
Depth	6" exclusive of connectors
Weight	1.5 lbs

This document is copyright © July 24, 2020 Novus Power Products LLC. All rights reserved. This document is provided for information purposes only; contents are subject to change without notice. It is not warranted to be error-free, nor subject to any other warranties or conditions including implied warranties and conditions of merchantability or fitness for a particular purpose.