


DATA SHEET FOR:	ND3626-R
REVISION	C
DATE	081921

# ND3626-R

## Distribution Amplifier - Six Channel

### KEY FEATURES

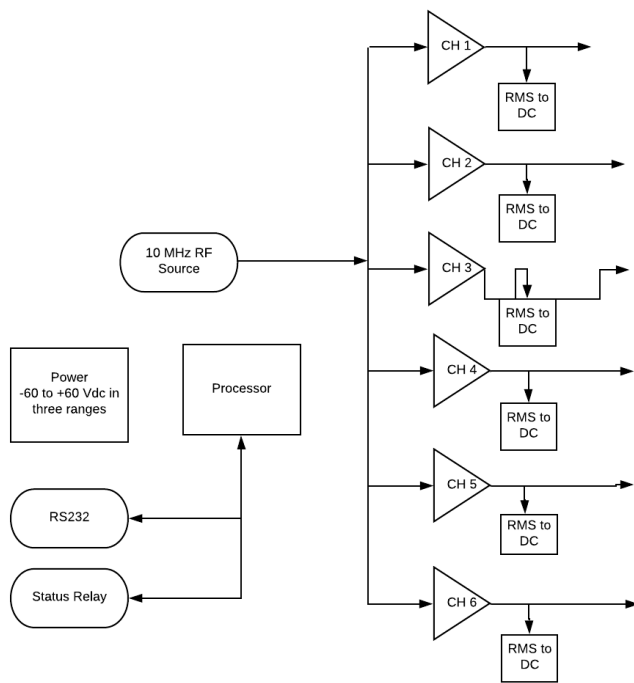

This low noise distribution amplifier has minimal phase noise contribution and flexibility. The ND3626-R can operate from - 60 Vdc to +60 Vdc in three ranges. There is also a power adapter available that will allow the unit to be operated from any global AC power source. Available as a lock-in amplifier

### Versatile Compact Package

6.0" x 6.0" x 1.6" package is ideal for embedded systems or remote locations. This design is also very popular in distributed systems minimizing cable runs.

### Supports 5 or 10 MHz Sources

Wide operating range options

### Versatile Power Options

The unit can be ordered to operate from 110 - 220 Vac,  $\pm(9$  to 15 Vdc),  $\pm(20$  to 30 Vdc) or  $\pm(40$  to 60 Vdc).



DATA SHEET FOR:	ND3626-R
REVISION	C
DATE	081921

## Technical Specifications

Frequency	10 MHz (available for applications from 10kHz to 12 MHz)
Amplitude	0.2 to 1.1 Volts rms into 50 Ohm
Power required	AC power adapter- 110 to 220 Vac 50/60 Hz DC options $\pm(10$ to 15 Vdc) $\pm(20$ to 30 Vdc) $\pm(40$ to 60 Vdc) Less than 6 watts
Harmonic distortion	Less than 30 dB
Connectors	Input and outputs are BNC Power connector mates with On-Shore Technology P/N OSTTJ0411530.
Status signal	Pins 3,4 of the power connector (normally closed floating solid state relay)
Indicators	Status, self-test and 6 channel fault indicators 1 - Alert LED goes from green to red if built-in test fails.
Phase Noise	-140dBc/Hz @1 Hz -160dBc/Hz @1kHz
Input impedance	50 Ohm
Gain	0 $\pm$ 0.2 dB

## Environmental and Mechanical

Operating temperature	0 to 50°C non-condensing
Storage temperature	-40 to 70°C
Height	1.55"
Width	6.0" (body width)
Depth	6.0"
Weight	< 1.5 lbs

## Options

--	--

This document is copyright © August 19, 2021 Novus Power Products LLC. All rights reserved. This document is provided for information purposes only; contents are subject to change without notice. It is not warranted to be error-free, nor subject to any other warranties or conditions including implied warranties and conditions of merchantability or fitness for a particular purpose.