


NR3700-T-CAL- GPSDO

GPS Locked Reference TCXO Holdover/AutoCal

KEY FEATURES

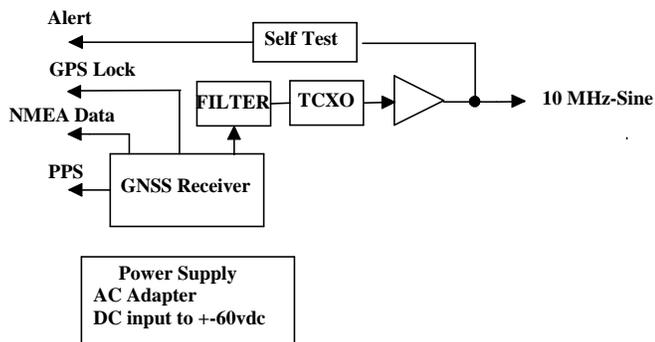

The signal source is a GNSS driven, mixed-signal phase lock loop generating a 10 MHz sine output from an intrinsically low jitter voltage-controlled crystal oscillator. The output is a 0.4 Vrms sine. The unit also features Auto Cal. There is extensive built-in test that drives an LED and relay contacts for system integration. The can operate from DC power from -60 Vdc to +60 Vdc- in three ranges. Power converter provides electrical isolation from the power source to the output (configuration option). Unit is available in a kit that includes the unit, antenna, power supply and cable to connect the antenna to the unit. Optional PPS and NMEA outputs. Low noise TCXO with unlock aging stability ± 1 ppm/year. OCXO option available. A low cost high performance GPSDO.

Product Highlights



High Sensitivity GPS Receiver

The 26 channel high-sensitivity, high-accuracy Multi-GNSS receiver. Supports TRAIM, GPS, GLONASS, QZSS, SBAS, Active Anti-Jamming and Advanced Multipath Mitigation Functions

Typical Phase Noise- 10 MHz Sine

Offset Frequency (Hz)	Typical (dBc / Hz)
10	--85
100	-115
1k	-140
10k	-145

Auto Cal

Multiple times a day, the unit stores the temperature/time performance of the holdover crystal. If GPS is lost, the unit uses the last best known compensation.

Company Datasheet #	NR3700-T-CAL
Revision #:	D
Date:	8-12-19

Technical specifications

10 MHz Sine	5 ±1 dBm ,50 ohm- BNC
Harmonics	Less than -30 dBc
Locked Stability	<~E-11 after 100 seconds
First Year Frequency Stability	±1 ppm (long-term unlocked)
Temp Stability	±10 ppb (unlocked)
Yearly aging	±1 ppm unlocked
Receiver sensitivity	-155dBm antenna power 3.5 vdc < 40 ma
PPS	15ns(1σ) (@-130 dBm) 50ns(1σ) (@-150 dBm) 10ns RMS accuracy, 3.3 volt logic, output impedance CMOS (±20ma)
Power Requirements	Three ranges ± (10 to 18, 19 to 36, 37 to 65) Vdc (ac adapter available) Power converter can be configured to provide > 500 volts isolation)
Connectors	BNC-1 10 MHz output SMA PPS 3.3 Vdc CMOS (optional)
	4 pin terminal block ((Digikey 277-2419-ND (ships with mate (Digikey 277-2418)-ND (reverse polarity operational)
NMEA (optional)	NMEA-0183 at full rs232 levels.

Environmental and Mechanical

Operating temperature	0 to 50C non-condensing (extended temperature range available)
Storage temperature	-40 to 70C
Width	3.5 inch (with flange)
Depth	4 inch
Height	1.2 in
Weight	~8 oz



Company Datasheet #	NR3700-T-CAL
Revision #:	D
Date:	8-12-19

This document is copyright © August 12, 2019 Novus Power Products LLC. All rights reserved. This document is provided for information purposes only; contents are subject to change without notice. It is not warranted to be error-free, nor subject to any other warranties or conditions including implied warranties and conditions of merchantability or fitness for a particular purpose.